

## EDGERIDER WHEELS® INSTALLATION ON A-1 QUILTING MACHINES (NEW CARRIAGE)


### PARTS THAT COME WITH THE KIT

- ❑ 8 – fully assembled wheels

### TOOLS NEEDED

- ❑ 3/16" Allen wrench to install the wheels.

1. On the machine, put the sliding-hub wheels on the right side (viewed from the front), the fixed wheels on the left side. On the carriage, the sliding wheels go on the back, the fixed ones on the front.
2. The wheels are assembled with their axles and spacers. You don't need to use any of the original bolts or washers.
3. Remove the cardboard disks and install the wheel assemblies at positions labeled on the packages.
4. The picture shows the wheels on the left side of the arm and the front of the carriage:

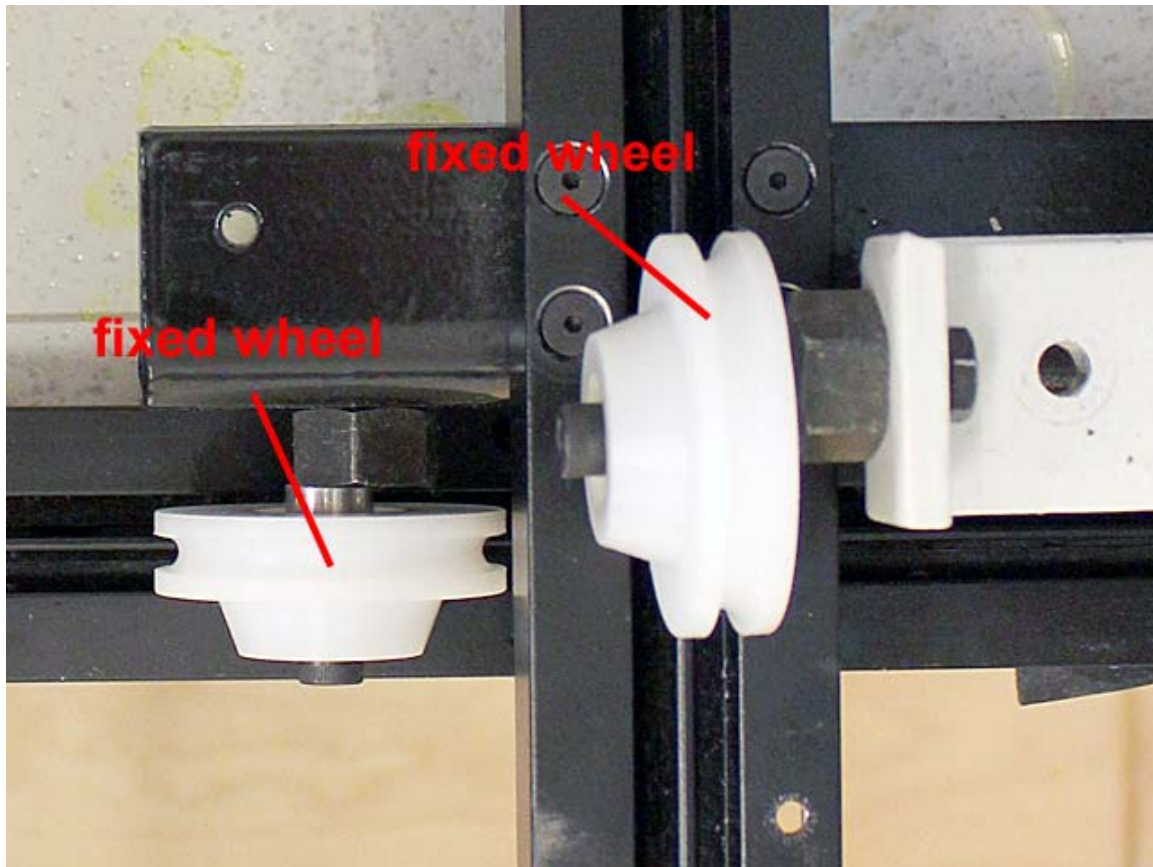

5. Remove the bolt from the wheels labeled MACHINE RIGHT. The bar between the axles on the right of the machine goes between the two large washers, where a cardboard disk was placed.
6. Push in the bolt and one large washer from the right side of the bar, then put on the other large washer, the two small washers, the sliding-hub wheel and the 1/4" aluminum spacer on the other side, then mount the assembly.
7. The picture shows the wheels on the right side of the arm and the back of the carriage:

